


PTFE Convuluted

Shallow Convuluted – GT02



KEY
ID - Internal Diameter
OD - Outside Diameter
MBR - Minimum Bend Radius
TPI - Turns Per Inch

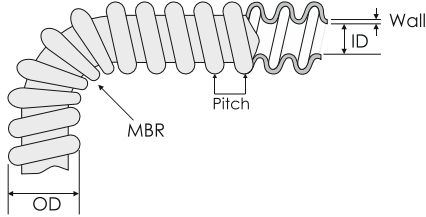

Material PTFE - Polytetrafluoroethylene (CF₂)_n
Applicable Standards Pan 6627
Manufacturer Grange Tubes LLP
Country of Origin UK
HS Code 39173200
ECCN EU99
Shelf Life & Storage No special requirements

PART CODE	ID Min		ID Nom		OD Max		Wall		MBR		Pitch		Weight
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	
GT02-06	0.182	4.62	0.187	4.75	0.320	8.13	0.018	0.46	0.321	8.15	0.111	2.82	25
GT02-09	0.273	6.93	0.281	7.14	0.415	10.54	0.022	0.56	0.437	11.10	0.125	3.18	43
GT02-10	0.302	7.67	0.312	7.92	0.448	11.38	0.024	0.61	0.562	14.27	0.125	3.18	56
GT02-12	0.365	9.27	0.375	9.53	0.508	12.90	0.026	0.66	0.625	15.88	0.125	3.18	61
GT02-14	0.425	10.80	0.437	11.10	0.557	14.15	0.026	0.66	0.812	20.62	0.125	3.18	75
GT02-16	0.485	12.32	0.500	12.70	0.613	15.57	0.026	0.66	0.937	23.80	0.125	3.18	77
GT02-20	0.610	15.49	0.625	15.88	0.758	19.25	0.027	0.69	1.063	27.00	0.125	3.18	93
GT02-24	0.730	18.54	0.750	19.05	0.914	23.22	0.030	0.76	1.125	28.58	0.143	3.63	138
GT02-28	0.850	21.59	0.875	22.23	1.075	27.31	0.030	0.76	1.375	34.93	0.167	4.23	182
GT02-32	0.975	24.77	1.000	25.40	1.226	31.14	0.032	0.81	1.500	38.10	0.167	4.23	191
GT02-40	1.220	30.99	1.250	31.75	1.539	39.09	0.035	0.89	1.875	47.63	0.200	5.08	246

APPLICATIONS

Our flexible helically formed PTFE Convuluted is widely used in the aerospace and automotive industries for cable harnessing. It is also used for fluid transfer, abrasion protection and thermal insulation. It is ideal for use in areas where there are hazardous chemicals and extreme temperatures.

SIZE RANGE

We produce a variety of different types of convuluted with bore sizes from 1.5mm to 38mm.

- GT01 - Light Wall
- GT02 - Shallow
- GT03 - Standard
- GT04 - Deep
- GTCRS - Crush Resistant
- SBC - Smooth Bore

COLOUR RANGE

Convuluted is available in black* as standard, other colours from our colour range are available on request.

* SBC is available in natural only.

PACKAGING

Can be supplied in random lengths on reels or in coils as appropriate. Cut lengths are available along with other options such as cuffed or plugged ends. Please refer to the Value-Added Services section for the full range. If you have any special packaging requirements, please contact our sales team.

VALUE ADDED SERVICES

- Cut lengths.
- Straightened ends
- Plugged ends.
- Cuffed ends
- Flared ends
- Punched & drilled holes.
- Slitting

PRODUCT COMPLIANCE

European Regulation (EC) No. 1907/2006 The Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH)

None of the Substances of Very High Concern (SVHC) included in the list of candidates for authorisation published by the European Chemicals Agency are present in concentrations greater than those permitted in any of the products manufactured and supplied by Grange Tubes LLP.

Directive (EU) 2017/2102 amending Directive 2011/65/EU - The Restriction of the use of certain Hazardous Substances in electrical and electronic equipment – RoHS3

None of the substances restricted by RoHS3 are present in quantities above those permitted within the regulation in any of the products manufactured and supplied by Grange Tubes LLP.

DISCLAIMER: The information in this Data Sheet is believed to be correct as of the date issued, no warranty is given as to the fitness of the Product for any particular purpose and any implied warranty or condition (statutory or otherwise) is excluded except to the extent that such exclusion is permitted by law. User is responsible for determining whether the product is fit for a particular purpose and suitable for user's method of use or application. Given the variety of factors that can affect the use and application of a product, some of which are uniquely within the user's control, it is essential that the user evaluate the product to determine whether it is fit for a particular purpose and suitable for user's method of use or application. The information is subject to change without notice and replaces all data sheets previously supplied. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Grange Tubes LLP was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict Grange Tubes LLP's liability for death or personal injury resulting from its negligence.

